WEBCONNECT





Simple

- Straightforward plug-&-play commissioning
- Other SMA devices are not required

Economical

- Reasonable investment costs and low installation effort
- Most favorable way of plant monitoring

Communicative

- Free online monitoring via Sunny Portal
- Clear display of the most important plant data with Sunny Portal


Direct

- Data exchange with Sunny Portal without data logger
- Free Sunny Portal app for data visualization on smartphones

WEBCONNECT

Direct data exchange with Sunny Portal

Ideally suited for online monitoring of small PV plants with a maximum number of up to four inverters: Webconnect provides free access to Sunny Portal without additional data logger – easily via an existing Internet access and a DSL router. After the simple installation of the inverter interface which is optionally available or already integrated at the factory, you can commission the Webconnect. Basically, it's plug-n-play. Once configured, key plant data can be accessed and displayed in a clear format whenever you need it. Moreover, automatic product updates ensure that the device firmware is always up-to-date.








- ¹ Supported inverters: STP 15000TLEE-10 / 20000TLEE-10, STP 15000TLHE-10 / 20000TLHE-10, STP 10000TL-10 / 12000TL-10 / 15000TL-10 / 17000TL-10, SB 2500TLST-21 / 3000TLST-21 / 3600TL-21 / 4000TL-21 / 5000TL-21
- $^2\,$ Supported inverters: SB 1300TL-10 / 1600TL-10 / 2100TL, SB 3300-11 / 3800-11, SMC 6000A-11

Technical data	Inverter with Webconnect functionality	Micro inverter with Webconnect functionality	
Communication	,,	,	
Sunny Portal	SMA Webconn	SMA Webconnect via Ethernet	
Connections			
Ethernet	RI	RI45	
Max. radio range			
Ethernet	10	100 m	
Supported Sunny Portal functions			
Online device updates		•	
Plant and device information			
Live data	•	•	
Panel Level Monitoring	_	•	
Plant description	Overview of the key pr	operties of the PV plant	
Annual comparison	Quick yield overview of t	Quick yield overview of the entire operating period	
System logbook		Access to messages regarding plant events	
Device Overview	Properties and parameters of	Properties and parameters of the devices in the PV plant	
Status reports	E-mail reports provide regular	E-mail reports provide regular information on plant yields and plant events	
Data management	Data consolidation	Data consolidation after two years	
Monitoring		•	
Inverter comparison	Fully automatic and continuous yi	Fully automatic and continuous yield comparison and e-mail alarms	
Communication monitoring		Ongoing monitoring of the connection between Sunny Portal and the PV plant	
Individual access		•	
Publication of specific pages	,	Access via the public area on Sunny Portal by all Internet users, ideal for personalized presentations on personal websites	
User roles	By assigning the roles of "guest" "plant administrator", you	By assigning the roles of "guest", "standard user", "installer" and "plant administrator", you can determine viewing and configuration rights of the different roles.	
Access			
Website	www.sunny	www.sunnyportal.com	
Smartphone	www.sunnyportal.mobi, Sunny Po	ortal App for iPhone and Android	
Standard feature			

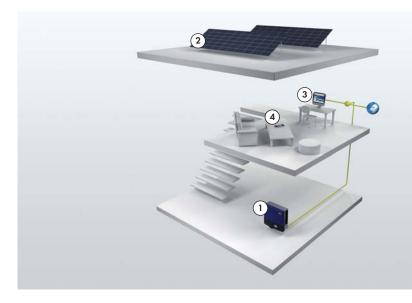

Typical plant design

Power generation

- 1 e.g. Sunny Tripower with Webconnect data module
- ② PV array

Plant monitoring

- ③ Sunny Explorer Sunny Portal
- 4 Mobile access